

FILTER HOUSING – AAF

DESCRIPTION

AAF filter housings have been specifically developed for high efficient removal of solid particles, water, oil aerosols, hydrocarbons, odour and vapours from compressed air ⁽¹⁾ systems. In addition, the filter housing was designed for easy installation. To meet the required compressed air quality appropriate filter or cyclone element must be installed into the housing.



APPLICATIONS ⁽²⁾

- General industrial application
- Automotive
- Electronics
- Food & Beverage
- Chemical
- Petrochemical
- Plastics
- Paint

⁽¹⁾ For any other technical gas please contact us or your local dealer

⁽²⁾ AAF filter housing can be used in a variety of applications. For applications not listed please contact us or your local dealer.

TECHNICAL SPECIFICATION

Operating temperature	1,5 - 65 °C	35 - 149 °F
Operating pressure	0 - 16 bar(g)	0 - 232 psi

MATERIALS

Housing material	Aluminium
Fittings, Screws	Brass, Brass-zinc plated, Steel
Cover	PA6
Sealing	NBR
Corrosion protection	Electrophoretic Coating (KTL)
Outside protection	Powder paint coated (Epoxy-polyester base)
Lubricant	Shell cassida grease RLS 2

SIZES

FILTER HOUSING	PIPE SIZE [inch]	FILTER ELEMENT ⁽³⁾	FLOW CAPACITY		DIMENSIONS [mm]				VOLUME [l]	WEIGHT [kg]
			[Nm ³ /h]	[scfm]	A	B	C	D		
AAF 0006	1/8	03528	10	6	105	55	14	50	0,07	0,23
AAF 0016	1/4	05528	18	11	125	55	14	70	0,09	0,24
AAF 0026	1/4	03844	25	15	145	73	18	50	0,22	0,42
AAF 0036	3/8	03844	30	18	145	73	18	50	0,22	0,42
AAF 0046	1/4	06050	35	22	189	88	32	60	0,44	0,72
AAF 0056	3/8	06050	60	35	189	88	32	60	0,45	0,71
AAF 0076	1/2	07050	78	46	189	88	32	80	0,45	0,70
AAF 0106	3/4	14050	120	70	257	88	32	150	0,64	0,78
AAF 0186	1	12075	198	116	261	125	37	160	1,4	1,9
AAF 0306	1	22075	335	197	361	125	37	250	2,0	2,4
AAF 0476	1 1/2	32075	510	300	461	125	37	350	2,6	2,6
AAF 0706	1 1/2	50075	780	459	641	125	37	530	3,6	3,5
AAF 0946	2	51090	1000	588	698	164	49	520	6,0	6,1
AAF 1506	2	76090	1500	882	944	164	49	770	8,3	8,0
AAF 1756	2 1/2	76090	1680	990	944	164	49	770	8,4	7,6
AAF 2006	3	51140	2160	1270	802	242	60	630	16,7	14,1
AAF 2406	3	75140	2760	1620	999	242	60	770	21,3	16,7

Flow capacity at 7 bar(g), 20°C

Standard is BSP pipe connection, other pipe connection on request.

⁽³⁾ For more information about filter and cyclone elements see their product data sheet.


PRESSURE EQUIPMENT DIRECTIVE PED 2014/68/EU (Fluid group 2)

AAF 0006 - AAF 0476	Article 4.3
AAF 0706 – AAF 1756	Category 1, Module H
AAF 2006 - AAF 2406	Category 2, Module H


PRESSURE EQUIPMENT DIRECTIVE PED 2014/68/EU (Fluid group 1)⁽⁴⁾

AAF 0006 - AAF 0186	Article 4.3
AAF 0306 – AAF 0476	Category 1, Module H
AAF 0706 - AAF 1756	Category 2, Module H
AAF 2006 – AAF2406	Category 3, Module H

⁽⁴⁾ Fluid group must be specified in the order, if not standard fluid group 2 is selected.

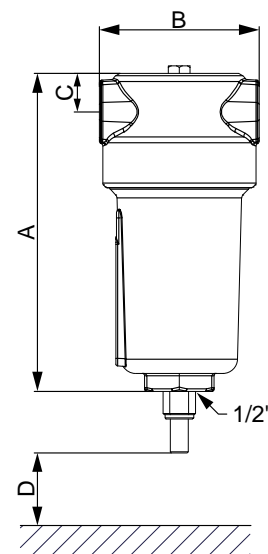

INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE

	Our quality management system is certified by BUREAU VERITAS in conformity with ISO 9001:2015 Reg. number: SL22594Q
---	--

CORRECTION FACTORS

To calculate the correct capacity of a given filter based on actual operating conditions, multiply the nominal flow capacity by the appropriate correction factor(s).

$$\text{CORRECTED CAPACITY} = \text{NOMINAL FLOW CAPACITY} \times C_{OP}$$


OPERATING PRESSURE

[bar]	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
[psi]	29	44	58	72	87	100	115	130	145	160	174	189	203	218	232
C _{OP}	0,38	0,5	0,63	0,75	0,88	1	1,13	1,25	1,38	1,50	1,63	1,75	1,88	2,00	2,13

MAINTENANCE

Replace filter element at least every 12 months or follow the instructions for specific filter element. Once per year make a visual check of filter housing and make sure there is no visual damage.

INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE

	<p>Our quality management system is certified by BUREAU VERITAS in conformity with ISO 9001:2015 Reg. number: SL22594Q</p>	
---	--	--

